



HYBRID CHEMICAL  
TECHNOLOGIES

# BIFUNCTIONAL CLAY CONTROL

---

## CS-150

V24.07.20

CS-150 is a high-performance liquid clay control product. This product offers superior performance over traditional chemistry and offers permanent, long-term inhibition of clays through swelling inhibition and fines migration.

## **ADVANTAGES**

- ♦ Provides a cost-effective clay control mechanism
- ♦ Long-term, permanent inhibition
- ♦ Dual-function additive prevents damage from both swelling and migrating clays

## **TREATMENT**

CS-140 typical dosage for oilfield fluids is 1.0 – 3.0 L/m<sup>3</sup> of product. Specific loadings are dependent on reservoir properties.

## **PRODUCT HANDLING**

Read the SDS carefully and completely prior to handling this product. Proper PPE should always be used.

This information is provided for general purposes only and is believed to be accurate at the time of publication. Fusion Technologies Inc. and its affiliates do not make any warranties or representations of any kind regarding the information and disclaim all express and implied warranties or representations to the fullest extent permissible by law, including those of merchantability, fitness for a particular purpose or use, title, non-infringement, accuracy, correctness or completeness of the information provided herein. All information is furnished 'as is' and without any license to distribute. The user agrees to assume all liabilities related to the use of or reliance on such information. FUSION TECHNOLOGIES INC SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL DAMAGES FROM ANY CAUSE WHATSOEVER INCLUDING BUT NOT LIMITED TO ITS NEGLIGENCE.

# PHYSICAL DATA

<b>STATE</b>	Liquid	<b>SG</b>	1.10
<b>COLOUR</b>	Pale	<b>pH</b>	6 - 8
<b>ODOUR</b>	Characteristic	<b>FREEZE</b>	-20°C


## CS-150

V24.07.20

CS-150



Alternative

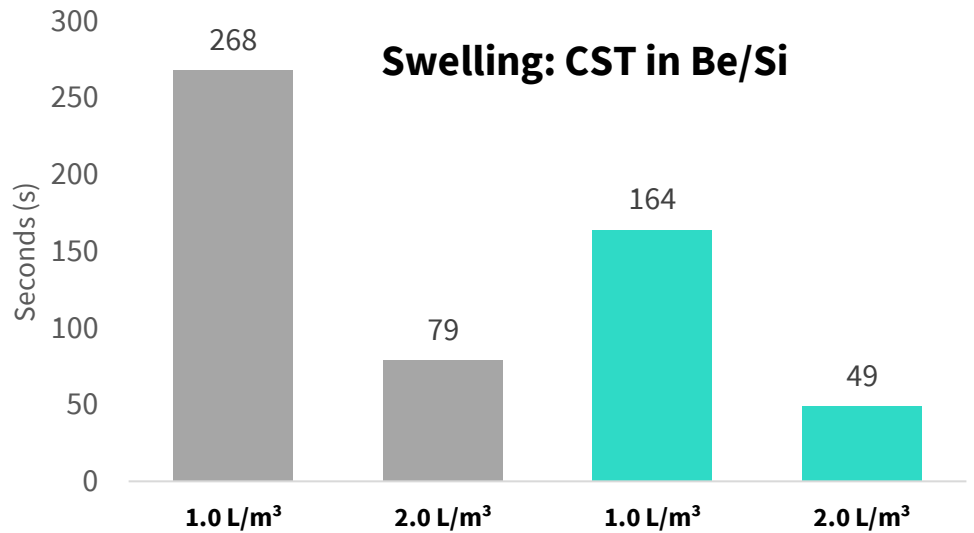

**Fines Control Comparison (1.0 L/m<sup>3</sup>)**

