



**HYBRID CHEMICAL
TECHNOLOGIES**

ENCAPSULATED OXIDATIVE BREAKER



HCAP-HT

HCAP-HT is an encapsulated oxidative breaker that slowly releases into the frac fluid and degrades the gel viscosity over time resulting in a cleaner and more conductive proppant pack. Encapsulation allows the oxidizer to be used at significantly higher concentrations without impacting fluid rheology. The additional breaker reduces polymeric filter cake, providing better communication channels within the stimulated formation. Typically, suitable for use in 85°C+ BHT reservoirs.

TREATMENT

HCAP-HT is generally used at a loading of 0.1 and 0.5 kg/m³, depending on BHT and gel strength.

PERFORMANCE

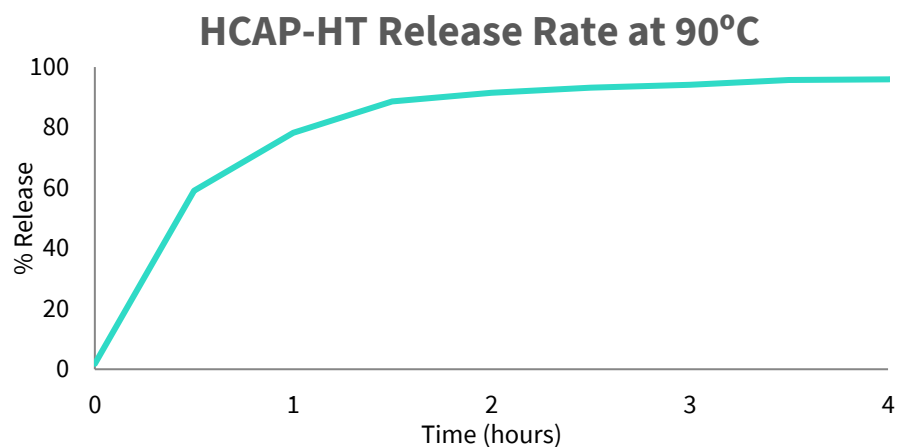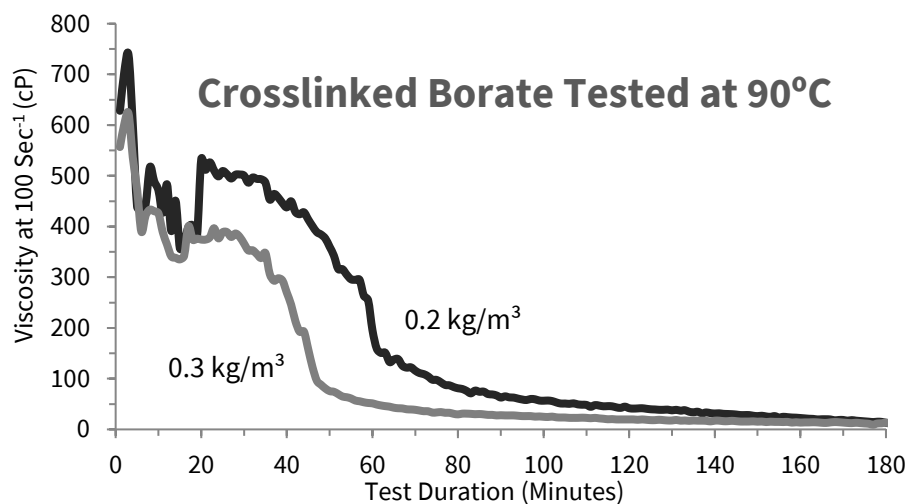

This information is provided for general purposes only and is believed to be accurate at the time of publication. Hybrid Chemical Technologies and its affiliates do not make any warranties or representations of any kind regarding the information and disclaim all express and implied warranties or representations to the fullest extent permissible by law, including those of merchantability, fitness for a particular purpose or use, title, non-infringement, accuracy, correctness or completeness of the information provided herein. All information is furnished 'as is' and without any license to distribute. The user agrees to assume all liabilities related to the use of or reliance on such information. HYBRID CHEMICAL TECHNOLOGIES SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL DAMAGES FROM ANY CAUSE WHATSOEVER INCLUDING BUT NOT LIMITED TO ITS NEGLIGENCE.